


HFRT plunger cylinder

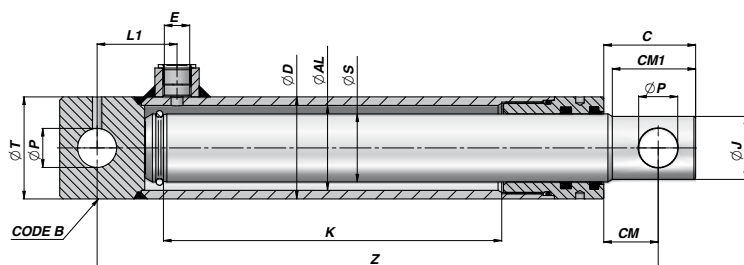

M250 enkeltvirkende/single acting

Max. hastighed • Max. speed: 0,5 m/s
 Arbejdstryk • Working pressure: 140 Bar
 Spidstryk • Peak pressure: 250 Bar
 Temperatur • Temperature: -25° til +80° C
 Stempelstang • Piston rod: UNI C45 steel, 25
 micron chrome (+/-5)
 Rør • Tube: ST52.3, DIN2393, ISO H9

Codice Code Bestell-Nr.	K	Z	kg	E BSP	L1	ØP	CM	C	ØJ	CM1	ØT	Code B
ØD 40 ØAL 30 ØS 25												
HFRT125100	100	190	1,63									CFHRT04030
HFRT125150	150	240	2,04									
HFRT125200	200	290	2,44	3/8"	40	14	24	38	22	35	40	
HFRT125250	250	340	2,85									
HFRT125300	300	390	3,26									
ØD 50 ØAL 40 ØS 30												
HFRT230200	200	300	3,61									CF04005016
HFRT230250	250	350	4,16									
HFRT230300	300	400	4,72	3/8"	42	16	26	42	27	37	50	
HFRT230350	350	450	5,27									
HFRT230400	400	500	5,82									
HFRT230550	550	650	7,30									
ØD 60 ØAL 50 ØS 40												
HFRT340200	200	330	6,00									CFHRT06050
HFRT340250	250	380	6,84									
HFRT340300	300	430	7,67	3/8"	47	23	32	54	37	49	60	
HFRT340350	350	480	8,49									
HFRT340400	400	530	9,32									
HFRT340550	550	680	11,70									
HFRT340700	700	830	14,10									
ØD 70 ØAL 60 ØS 50												
HFRT450300	300	460	11,80									CFHRT07060
HFRT450400	400	560	14,00	3/8"	50	25,5	49	74	47	65	65	
HFRT450550	550	710	17,50									
HFRT450700	700	860	21,00									