


HTO plunger cylinder

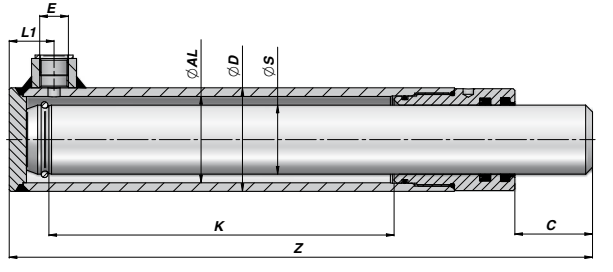

M250 enkeltvirkende/single acting

Max. hastighed • Max. speed: 0,5 m/s
 Arbejdstryk • Working pressure: 200 Bar
 Spidstryk • Peak pressure: 250 Bar
 Temperatur • Temperature: -25° til +80° C
 Stempelstang • Piston rod: UNI C45 steel,
 25 micron chrome (+/-5)
 Rør • Tube: ST52.3, DIN2393, ISO H9

Codice Code Bestell-Nr.	K	Z	kg	E BSP	L1	C
ØD 50 ØAL 40 ØS 30						
HT02300200	200	326	3,64	3/8"	23	40
HT02300250	250	376	4,19			
HT02300300	300	426	4,75			
HT02300350	350	476	5,31			
HT02300400	400	526	5,86			
HT02300500	500	626	6,96			
ØD 60 ØAL 50 ØS 40						
HT03400200	200	338	5,64	3/8"	26	45
HT03400300	300	438	7,29			
HT03400400	400	538	8,98			
HT03400500	500	638	10,61			
HT03400600	600	738	12,28			
ØD 70 ØAL 60 ØS 50						
HT04500300	300	450	10,47	3/8"	30	50
HT04500400	400	550	12,86			
HT04500500	500	650	15,14			
HT04500600	600	750	17,50			