


## METRIC FEMALE 24° CONE - S TYPE (1)

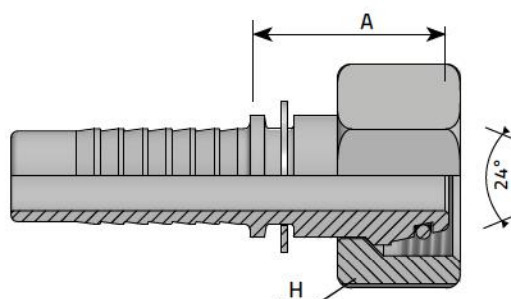


FEMMINA DIRITTA METRICA O-RING 24° DKOS  
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S  
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

\* CRIMPED NUT  
 DADO PINZATO

| Code        | Tube |       | Diam | Thread    | Dimensions |    |      | Pressure |      |
|-------------|------|-------|------|-----------|------------|----|------|----------|------|
|             | D.N. | Hose  |      |           | D          | H  | A    | Bar      | Psi  |
|             | Inch |       | mm   | T         | mm         | mm | mm   |          |      |
| FE0314S6    | -3   | 3/16" | 4.8  | M14 x 1.5 | 6          | 19 | 25.5 | 420      | 6091 |
| FE0316S8    | -3   | 3/16" | 4.8  | M16 x 1.5 | 8          | 19 | 25.5 | 420      | 6091 |
| * FE0414S6  | -4   | 1/4"  | 6.4  | M14 x 1.5 | 6          | 17 | 25.5 | 450      | 6526 |
| FE0416S8    | -4   | 1/4"  | 6.4  | M16 x 1.5 | 8          | 19 | 26   | 450      | 6526 |
| FE0418S10   | -4   | 1/4"  | 6.4  | M18 x 1.5 | 10         | 22 | 26   | 450      | 6526 |
| FE0420S12   | -4   | 1/4"  | 6.4  | M20 x 1.5 | 12         | 24 | 26   | 450      | 6526 |
| FE0518S10   | -5   | 5/16" | 7.9  | M18 x 1.5 | 10         | 22 | 26.5 | 350      | 5076 |
| FE0520S12   | -5   | 5/16" | 7.9  | M20 x 1.5 | 12         | 24 | 26   | 350      | 5076 |
| * FE0618S10 | -6   | 3/8"  | 9.5  | M18 x 1.5 | 10         | 22 | 26.5 | 450      | 6526 |
| FE0620S12   | -6   | 3/8"  | 9.5  | M20 x 1.5 | 12         | 24 | 26.5 | 450      | 6526 |
| FE0622S14   | -6   | 3/8"  | 9.5  | M22 x 1.5 | 14         | 27 | 27   | 450      | 6526 |
| FE0822S14   | -8   | 1/2"  | 12.8 | M22 x 1.5 | 14         | 27 | 27.5 | 420      | 6091 |
| FE0824S16   | -8   | 1/2"  | 12.8 | M24 x 1.5 | 16         | 30 | 32   | 420      | 6091 |
| FE1030S20   | -10  | 5/8"  | 16   | M30 x 2   | 20         | 36 | 37   | 350      | 5076 |
| FE1230S20   | -12  | 3/4"  | 9.5  | M30 x 2   | 20         | 36 | 37.5 | 350      | 5076 |

## METRIC FEMALE 24° CONE - S TYPE (2)

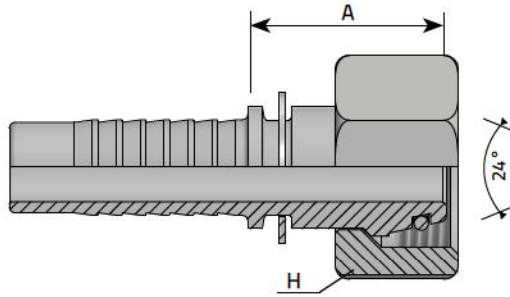

FEMMINA DIRITTA METRICA O-RING 24° DKOS  
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S  
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

| Code      | Tube |              |            | Thread  | Dimensions |         |         | Pressure |      |
|-----------|------|--------------|------------|---------|------------|---------|---------|----------|------|
|           | D.N. | Hose<br>Inch | Diam<br>mm |         | T<br>mm    | D<br>mm | H<br>mm | A<br>mm  | Bar  |
| FE1236S25 | -12  | 3/4"         | 19         | M36 x 2 | 25         | 46      | 38.5    | 350      | 5076 |
| FE1636S25 | -16  | 1"           | 25.4       | M36 x 2 | 25         | 46      | 39.5    | 280      | 4061 |
| FE1642S30 | -16  | 1"           | 25.4       | M42 x 2 | 30         | 50      | 40.5    | 280      | 4061 |
| FE2042S30 | -20  | 1.1/4"       | 31.8       | M42 x 2 | 30         | 50      | 41.5    | 210      | 3046 |
| FE2052S38 | -20  | 1.1/4"       | 31.8       | M52 x 2 | 38         | 60      | 47      | 210      | 3046 |
| FE2452S38 | -24  | 1.1/2"       | 38.1       | M52 x 2 | 38         | 60      | 47      | 185      | 2683 |